HOOLIGAN TOOL

The Hooligan Tool is one of the world´s most popular forcible entry tools. These heavy-duty tools were designed to pound, puncture, pry, twist, and cut all types of barriers encountered by emergency service personnel. The head and claw are forged from high alloy steel, heat treated for maximum strength, then fitted to a 1" (2.5 cm) stress proof bar. The bar has machine grooved non-slip grips. The Hooligan Tool features a claw that is gently curved for maximum prying leverage. The claw opening is parallel and fits over locks, hasps and many door bars. It can also be used as a nail puller and a gas shut off during emergencies. The "Highway Hooligan Tool" features a metal cutting claw with a machine sharpened metal cutter that uses the can opener principle to cut heavy gauge metal and composites.

RECOMMENDED USERS:
- FIRE DEPARTMENTS
- LAW ENFORCEMENT AGENCIES
- RESCUE SQUADS
- HAZMAT TEAMS
- PLANT/REFINERY MAINTENANCE CREWS
- MILITARY AND PUBLIC UTILITIES

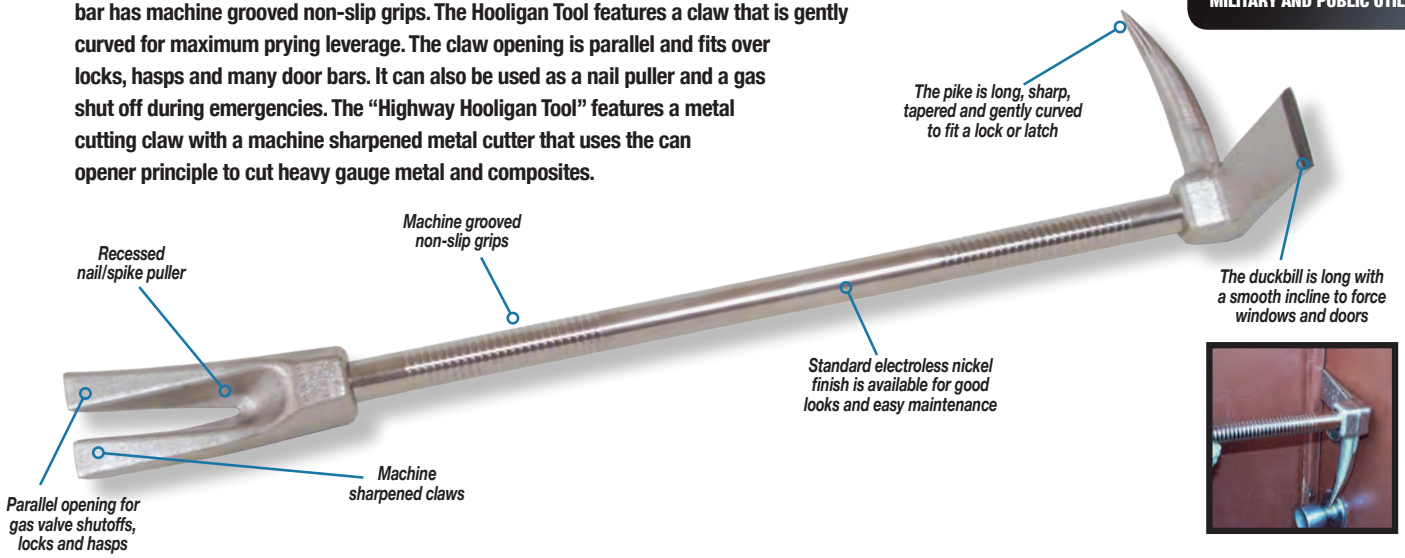

- ***Standard Claw:*** *Parallel opening for gas valve shutoffs, locks and hasps. Machine sharpened claws. Recessed nail puller. Claw radius for prying leverage.*

- ***Metal Cutting Claw:*** *Combines the capability of prying and metal cutting. Machine sharpened metal cutter uses can opener principle to cut heavy gauge metal and composites.*

HOOLIGAN TOOL WITH STANDARD CLAW ELECTROLESS NICKEL FINISH

Part No.	Description	Length:	in	cm	Net Weight:	lb	kg
22-000599	24 in / 61.0 cm Hooligan Tool		24.0	61.0		9.2	4.2
22-000600	30 in / 76.2 cm Hooligan Tool (pictured)		30.0	76.2		10.6	4.8
22-000601	36 in / 91.4 cm Hooligan Tool		36.0	91.4		11.9	5.4
22-000602	42 in / 106.7 cm Hooligan Tool		42.0	106.7		13.2	6.0

HOOLIGAN TOOL LIGHTWEIGHT ALUMINUM HANDLE AND STANDARD CLAW WITH ELECTROLESS NICKEL FINISH

Part No.	Description	Length:	in	cm	Net Weight:	lb	kg
22-000424	24 in / 61.0 cm Hooligan Tool - Lightweight (pictured)		24.0	61.0		6.8	3.1
22-000430	30 in / 76.2 cm Hooligan Tool - Lightweight		30.0	76.2		7.3	3.3

PARATECH

www.paratech.com

PARATECH HEADQUARTERS: P.O. BOX 1000, FRANKFORT, IL 60423 USA
TOLL FREE: +1 800 435 9358 PHONE: +1 815 469 3911 FAX: +1 815 469 7748 EMAIL: paratech@paratech.com

PARATECH EUROPE: P.O. BOX 174, 5260 ODENSE S, DENMARK
PHONE: +45 66 11 24 22 FAX: +45 66 11 32 EMAIL: paratech@paratech.dk

CERTIFICATE NO. ISO9001:2008

SPF HOOLIGAN

Part No.	Description	Length:	in	cm	Net Weight:	lb	kg
22-000680	SPF Hooligan 30 in / 76.2 cm		30.0	76.2		9.7	4.4

The SPF Hooligan is a single piece forged (SPF) tool intended to exceed FDNY specifications for their primary hand held forcible entry tools. It is the very first redesigned, (features included) single piece Halligan type tool.

FEATURES:
- Single Piece, closed die Forging for absolute consistent lengths
- Recessed nail puller type claw, a thin curved profile
- Cable groove at the rear of the tool head
- Electroless nickel plating

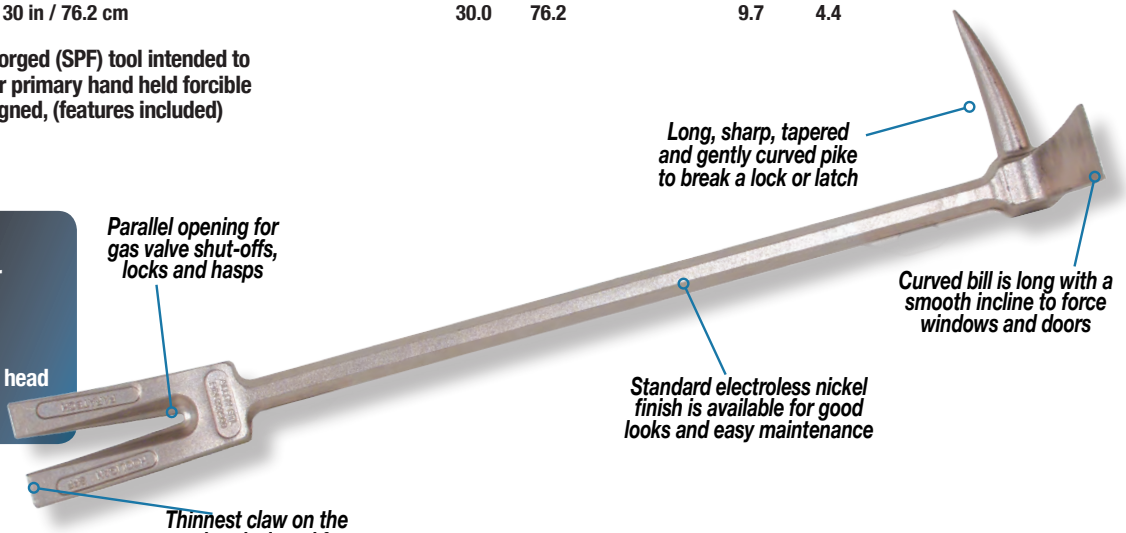

HIGHWAY HOOLIGAN WITH METAL CUTTING CLAW WITH ELECTROLESS NICKEL FINISH

Part No.	Description	Length:	in	cm	Net Weight:	lb	kg
22-000622	30 in / 76.2 cm Highway Hooligan Tool		30.0	76.2		10.6	4.8
22-000623	36 in / 91.4 cm Highway Hooligan Tool (pictured)		36.0	91.4		11.9	5.4
22-000624	42 in / 106.7 cm Highway Hooligan Tool		42.0	106.7		13.3	6.0

HOOLIGAN–SPARK RESISTANT STANDARD CLAW AND METAL CUTTING CLAW

Designed for emergency service personnel operating in the presence of hazardous vapors and combustible residues, this Hooligan is an important addition to your HazMat tool arsenal. The head and claw are manufactured entirely from spark resistant AMPCO 45.

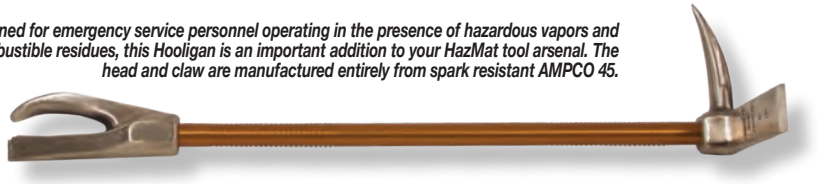

Part No.	Description	Length:	in	cm	Net Weight:	lb	kg
22-891600	30 in / 76.2 cm Spark Resistant - Standard Claw		30.0	76.2		7.2	3.3
22-891622	30 in / 76.2 cm Spark Resistant - Metal Cutting Claw (pictured)		30.0	76.2		7.1	3.2

PARATECH
www.paratech.com
PARATECH HEADQUARTERS: P.O. BOX 1000, FRANKFORT, IL 60423 USA
TOLL FREE: +1 800 435 9358 PHONE: +1 815 469 3911 FAX: +1 815 469 7748 EMAIL: paratech@paratech.com
PARATECH EUROPE: P.O. BOX 174, 5260 ODENSE S, DENMARK
PHONE: +45 66 11 24 22 FAX: +45 66 11 32 EMAIL: paratech@paratech.dk
CERTIFICATE NO. ISO9001:2008